

AUDIBLE ALARMS



PIEZO SERIES BUZZERS

OVERVIEW


Small but extremely powerful, the PW and PB series of panel mount piezo sound alarms was designed to be a cost-effective audible alarm for use in industrial control systems. It is molded from tough GE Valox, weatherproof and suitable for use in corrosive environments, outdoor and indoor.

FEATURES

- Distinctive tones cut through ambient noise
- UL Recognized for use in UL Type 3, 3R, 4X, 12 and 13 environments
- All solid state construction equals reliability
- Encapsulated for durability and corrosion resistance
- Molded from tough GE Valox
- Low power consumption
- Installs in 1.125" hole or 3/4" standard knock out
- Comes with gasket installed
- PB Series available in black; PW available in red and black

SPECIFICATIONS

- Operating temperature: -20°C to 50°C
- Electrical connections: 1/4" Quick connect terminals
- Multi-tone buzzers have 3 terminals
- Fits panels up to 1/4" thick
- Adjustable volume damper

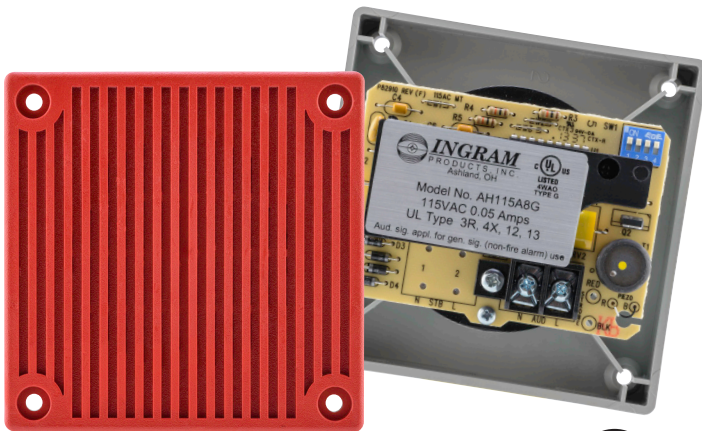

AH SERIES SOUNDERS

Part Number	Description	List Price
AH115A8G	115 VAC Sounder - Gray	\$85.92
AH115A8R	115 VAC Sounder - Red	\$85.92
AH1224D8G	12/24 VDC Sounder - Gray	\$85.92
AH1224D8R	12/24 VDC Sounder - Red	\$85.92

OVERVIEW

The Ingram 120 VAC Sounders are NEMA and UL Type 4X alarm horn suitable for heavy duty applications inside and outdoors. This horn features 8 user selectable alert sounds. Add quality to your control panel with the Ingram Sounder.

FEATURES

- Loud 110+ decibels at 5 feet
- 8 User selectable alert sounds
- Two user selectable sound level outputs (Normal and High)
- Piezo electronic means a low power requirement of only 50mA @ 115VAC
- UL Recognized for use on UL Type 3, 3R, 4, 4X, 12 and 13 enclosures
- Does not generate electrical noise due to piezo electronic sound element
- Low profile, protrudes less than 1 inch from mounting surface.
- Self locking stainless steel hex nut makes sounder tamper proof.
- Highly reliable Solid State circuitry
- Each screw clamp terminal will accept two #18 to #12 AWG wires each
- PLC compatible (may require a load resistor)
- Two year warranty

SPECIFICATIONS

- Operating temperature: -20°C to 50°C
- Electrical connections: 1/4" Quick connect terminals
- Multi-tone buzzers have 3 terminals
- Fits panels up to 1/4" thick
- Adjustable volume damper

PIEZO SERIES BUZZERS

Part #	Voltage	Tone	dB Level	List Price
PB-024 AD	5-24 VAC	Warble	95dB	\$19.28
PW24D	10-28 VDC	Warble	95dB	\$22.95
PW12D	4-15 VDC	Warble	95dB	\$22.95
PW120A	40-130 VAC	Warble	95dB	\$26.49
PB-120-A	40-125 VAC	Warble	95dB	\$21.55
PB120AMB-X	120 VAC	Medium Loud Beep	95dB	\$26.49
PB120AFB-X	120 VAC	Fast Beep	108dB	\$26.49
PB120AFS-X	120 VAC	Fast Siren	95dB	\$26.49
PB120AXC-X	120 VAC	Extra Loud Continuous	103dB	\$26.49
PB120AMC-X	120 VAC	Medium Loud Continuous	95dB	\$26.49
PB628DUS-X	6-28 VDC	Ultra Loud Siren	95dB	\$22.95
PB628DUW-X	6-28 VDC	Ultra Loud Warble	108dB	\$20.66
PB628DUT-X	6-28 VDC	Ultra Loud Staccato	95dB	\$22.95
PB630ADFS-X	6-30 AC-DC	Fast Siren	95dB	\$25.66
PB624ADFB-X	6-24 AC-DC	Fast Beep	108dB	\$25.66
PB628DUW/UC-X	6-18 VDC	Ultra Loud Warble or Continuous	108dB	\$22.95
PB525DCH-X	5-25 VDC	Chime	103dB	\$22.95
PB524ADMW-X	5-24 AC-DC	Medium Loud Warble	95dB	\$25.66
PB515DUW/UC-X	5-15 VDC	Ultra Loud Warble or Continuous	108dB	\$22.95
PB530ADMC-X	5-30 AC-DC	Medium Loud Continuous	103dB	\$25.66
PB330DXCX-X	3-30 VDC	Extra Loud Continuous	95dB	\$22.95
SM12D	12 VDC Silence Mod	—	—	\$16.01
SM24D	24 VDC Silence Mod	—	—	\$16.01
SMADP	Silence Module Ad	—	—	\$3.15

